

# ONDULINE® TILE

## TECHNICAL DATA SHEET


### MATERIAL / APPLICATION

Corrugated bitumen sheet reinforced with cellulosic fibers and thermosetting resin. The composite is colored with inorganic pigments. Lightweight corrugated roofing material and wall-cladding material. Ideal for all types of applications.



### TECHNICAL CHARACTERISTICS

Length	195 cm
Width	96 cm
Profile	7 corrugations + 6 flat parts
Sequence	14,4 cm
Corrugation height	3,8 cm
Corrugation Pitch	9,6 cm
Weight per sheet	5,9 kg
Weight per m <sup>2</sup>	3,15 kg / m <sup>2</sup>
Thickness	3 mm
Total surface	1,87 m <sup>2</sup>
Coverage surface Pitch 9% to 17% (5° - 10°)	1,32 m <sup>2</sup> (full deck)
Coverage surface Pitch >17% (10°)	1,58 m <sup>2</sup> (max 46 cm)
Onduline Waterproofing Warranty	15 years
Norm	EN 534:2010
Category	CE – Category S
European DOP	07-002 2016-05-23

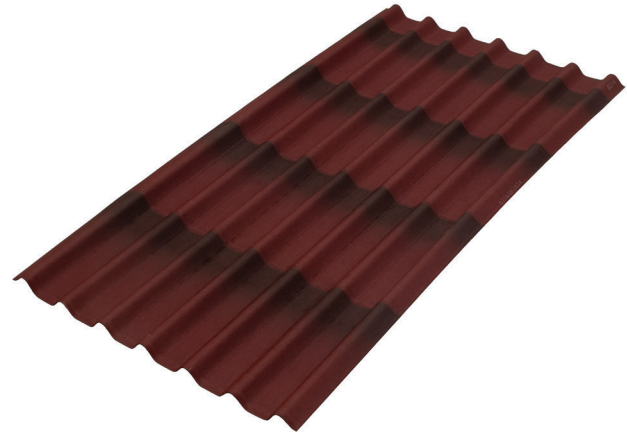


### INSTALLATION

Special conditions of installation are required. Refer to the installation guide.


### APPLICATION AND WARRANTY

All the claims will be considered with respect to application recommendations issued by Onduline company.

#### Embossed lines

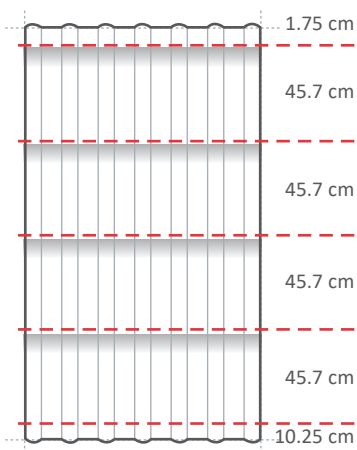


#### Nail Marking

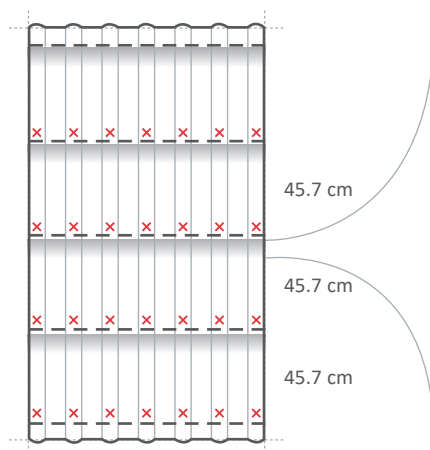

#### Shading effects

4 shadow lines per sheet, every 45.7 cm

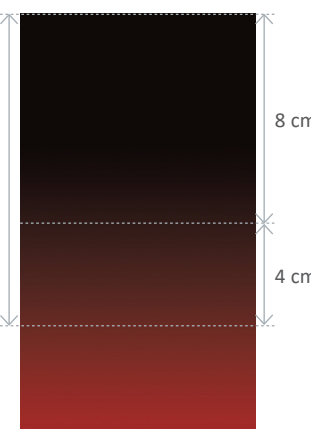

This TDS was made based on currently available information. Product was made in accordance with above mentioned parameters but producer/distributor can't anticipate any future change as well as change of regulations. It is the consumer's responsibility to use the product in accordance to producer/distributor recommendations and his needs.

[sea.onduline.com](http://sea.onduline.com)

Onduline Building Materials (M) SDN BHD  
2715 Mukim 1, Tingkat Peru Sahaan Enam  
Kawasan Perusahaan Perai, 13600 Perai. Penang, Malaysia

05/2016

**Onduline®**