


**BITULINE®**

**onduline®**  
Lightweight roofing systems

# BITULINE®

Bitumen Torch-on Waterproofing Membrane System.

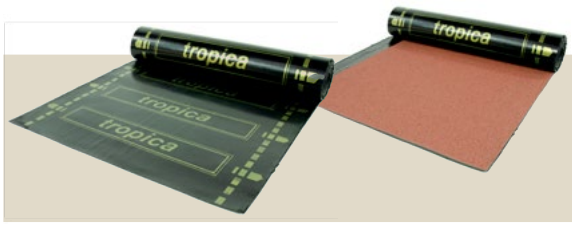

## PROFILES 型材 PROFIL



High quality



Mechanical resistant



Watertight




Durable




UV resistant

### TP300

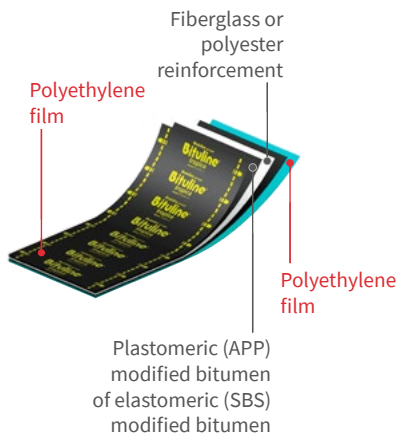

### TP40M

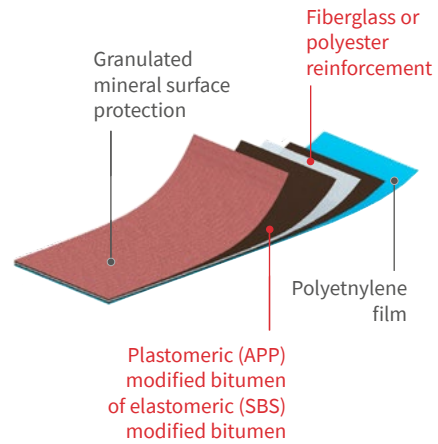

Length 长度 Panjang	10 m
Width 宽度 Lebar	1 m
Thickness 厚度 Ketebalan	3 mm
Weight 重量 Berat	± 40 kg (3.5 kg per m <sup>2</sup> )
Cold flexibility 低温柔性 Kelenturan pada suhu rendah	≤ 0 °C
Heat flow 热流 Aliran haba	≥ 110 °C
Tensile strength 抗拉强度 Kekuatan tegangan	400/300 (N/5 cm)
Elongation 伸长率 Kadar pemanjangan	20%

Length 长度 Panjang	10 m
Width 宽度 Lebar	1 m
Thickness 厚度 Ketebalan	3.5 mm
Weight 重量 Berat	± 42 kg (4.1 kg per m <sup>2</sup> )
Cold flexibility 低温柔性 Kelenturan pada suhu rendah	≤ 0 °C
Heat flow 热流 Aliran haba	≥ 110 °C
Tensile strength 抗拉强度 Kekuatan tegangan	400/300 (N/5 cm)
Elongation 伸长率 Kadar pemanjangan	20%

## COLOR 颜色 WARNA



Black



Red



Green



Grey

Contact us for more information.