




ONDUCLAIR[®] PC



Onduline[®]
Lightweight roofing systems

ONDUCLAIR® PC

Transparent polycarbonate panels for roof and facades.

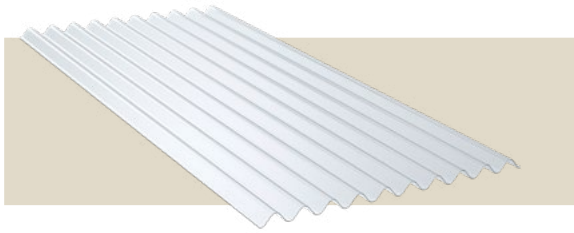

PROFILES 型材 PROFIL



UV resistant



Impact resistant



Fire resistant




Light transmission




Weather resistant

ONDULINE® 95

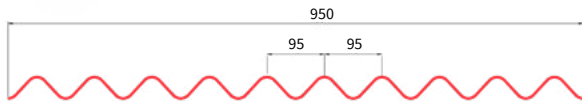

NERVESCO 1000

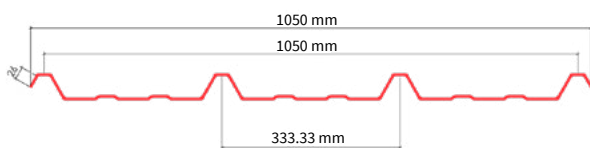

Profile upon request.


From 1.50 to 12 m (other lengths available on request).

SPECIFICATION 规范 SPECIFIKASI

Length 长度 Panjang	2000 mm
Width 宽度 Lebar	ONDULINE® 95: 950 mm NERVESCO 1000: 1000 mm
Thickness 厚度 Ketebalan	0.8 mm, 1 mm, 1.2 mm
Finish 表面处理 Kemasan	1 external side UV protection
Color 颜色 Warna	Crystal, Opal, Translucent Brown, and Opaque White
Fire rating 阻燃等级 Penarafan kebakaran	B-s1, d0
Light transmission 透光率 Penularan cahaya	Crystal: 90%; Opal: 66% or 46%
Impact resistance 抗冲击性 Rintangan hentaman	1200 joules
Service temperature 服务温度 Suhu	-40 °C to +110 °C



ONDUCLAIR® PC for roofing

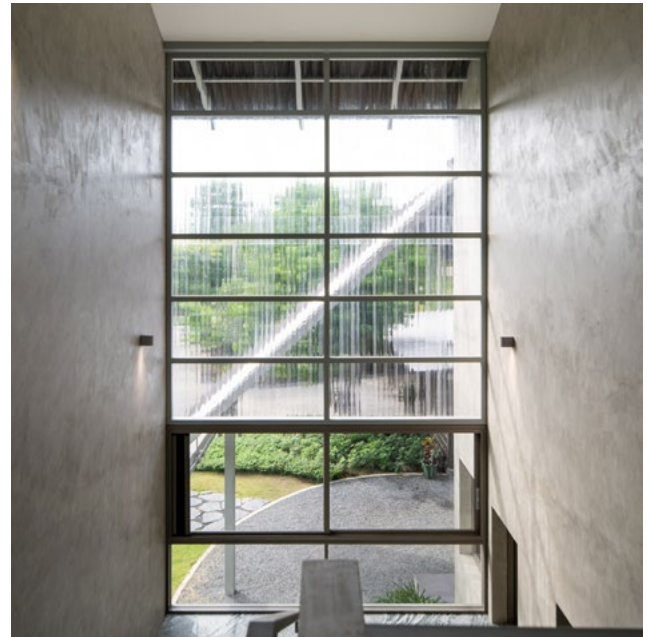

ONDUCLAIR® PC for facades

Contact us for more information.